

Proper Forklift Positioning


When moving, forklift forks should be in the lowered position (5 to 20 cm off the ground) if possible.



If needing to be lifted, they should be kept as close to the ground as possible.



When parked, the forks should be positioned to make them as little of a tripping hazard as possible.

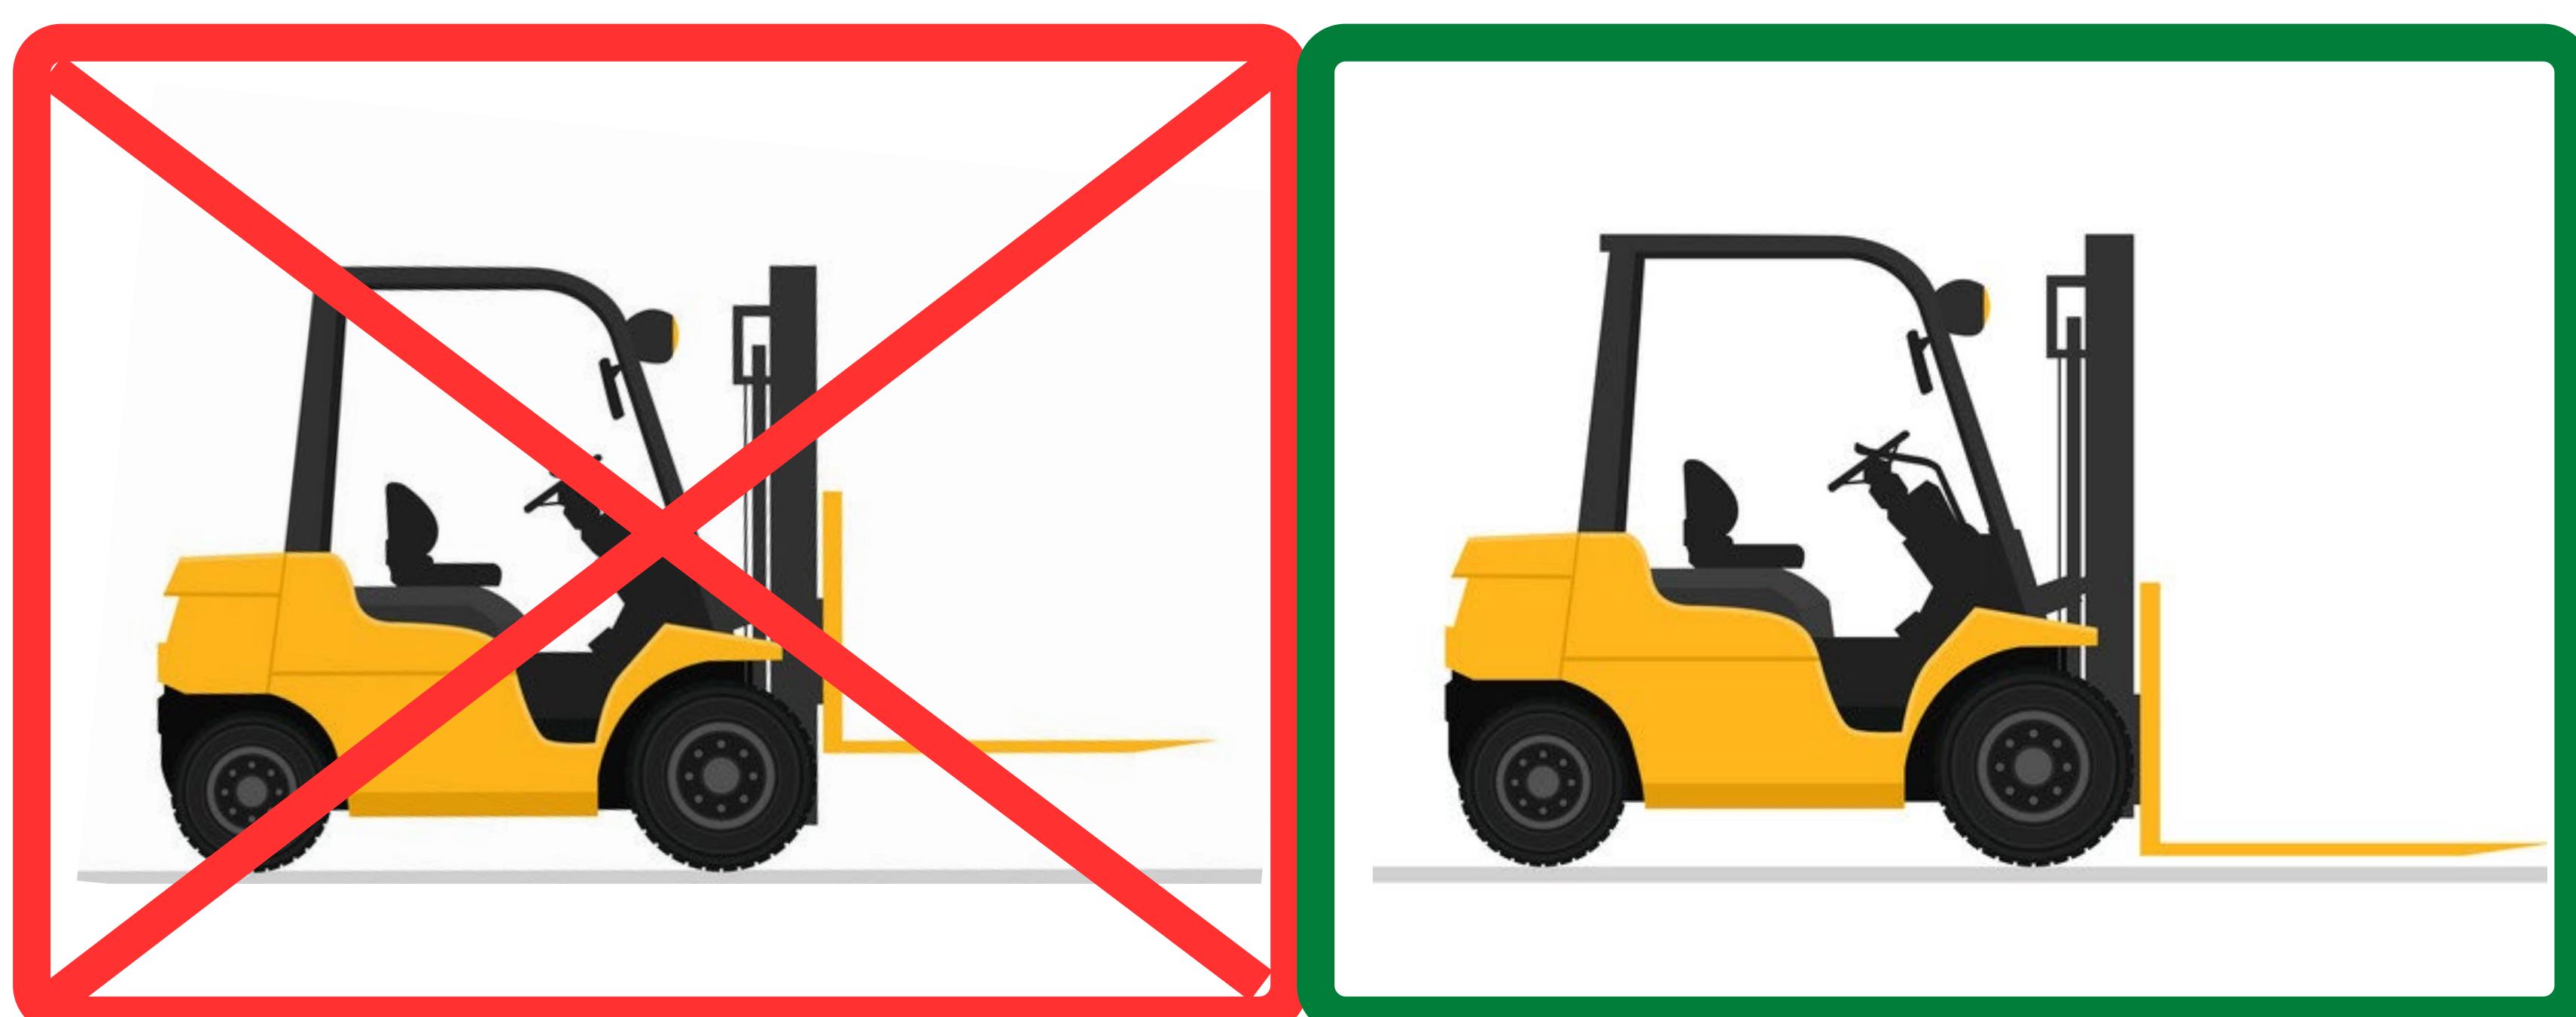

The forks should be tilted downwards before lowering them. If the forks are tilted after being lowered, it puts stress on the mast pulleys and hoses when raised by the next driver. This can cause damage to the forklift over time.

“Safety is a core value and business Priority”