

Building and Dismantling Scaffolding



Hazards

Scaffolders are exposed to heights and falls the majority of the time they are building or dismantling scaffold. Those building or dismantling scaffolding, even if not at heights, must complete a FLHA card prior to starting. If working at heights, a fall protection plan must be made.

PPE

Eye protection, hard hat, safety footwear, high visibility clothing, and hearing protection are mandatory for all activities within the mill. Additional PPE for scaffolders working on scaffolding:


- Define Type Gloves
- Fall Protection Harness
- Fall Protection SRL or lanyard



Work Instruction

All scaffolding must comply with WorkSafe BC's Code of Practice for Access to Scaffold, and CPP's Scaffold Erection and Inspection Policy.

There must be a minimum of one person for every deck height that is 6 feet or greater, plus the ground person.

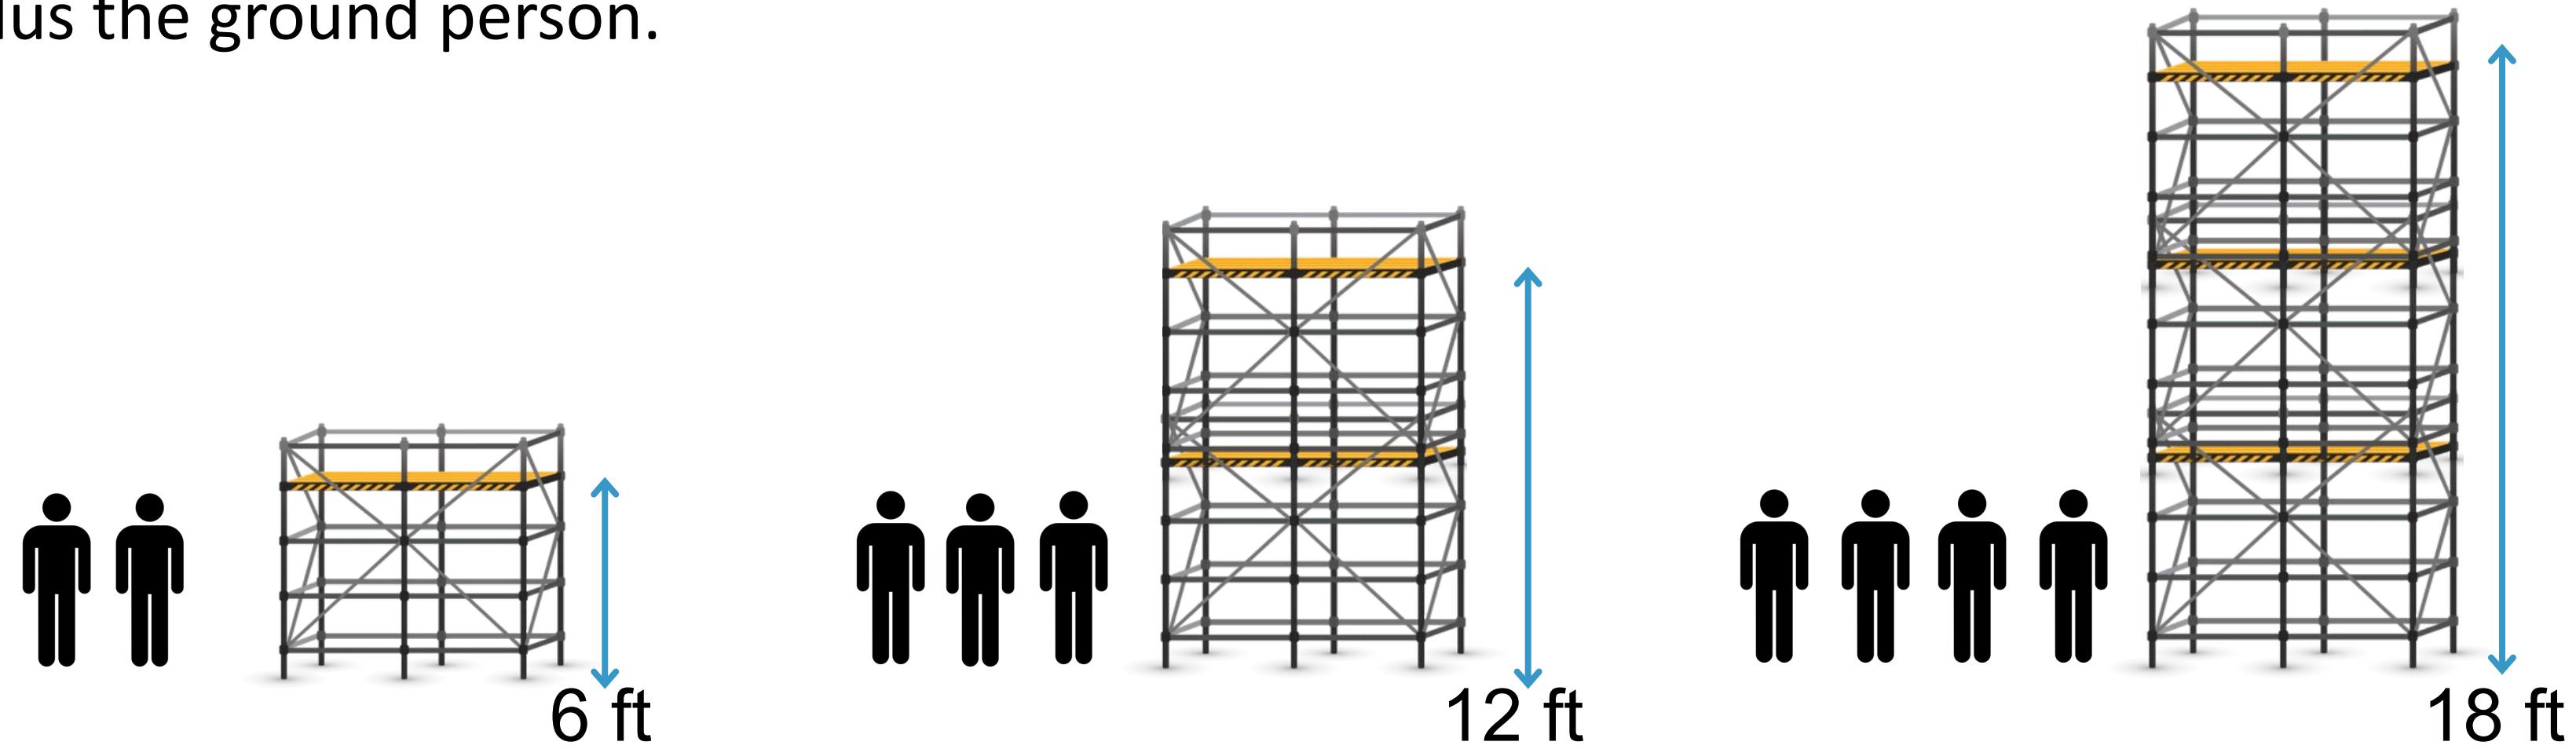

Of the all the people involved, only the person(s) building the scaffold needs to be qualified. The others will be part of the gear chain and rescue plan.

During the installation or dismantling of overhead scaffolding, the area around must be secured, and access limited.

"Safety is a core value and business priority"